

SPDF HEAT-SHRINKABLE THREE CORE PILC/PICAS OUTDOOR TERMINATION

Up to 12 kV

6/10 (12) kV
6.35/11 (12) kV

Application

Heat-shrinkable terminations for three core PILC/PICAS cables, are widely used by power utilities and in industrial applications.

For use outdoors and exposed to prolonged sunshine and other weather conditions.

Design

1. Cable lug (supplied on request).
2. Water sealing mastic.
3. Anti-tracking heat-shrinkable tube.
4. Anti-tracking sheds.
5. Stress control heat-shrinkable tube.
6. Stress control mastic.
7. Break-out.
8. Oil barrier tube.
9. Anti-tracking tri-shed.


Specifications and standards

Meets the requirements of CENELEC HD 629.1 and IEC 60502-4.

Ordering instructions

Select the part number and add both system voltage and conductor size range.

Example part number:
SPDF 12/95-240

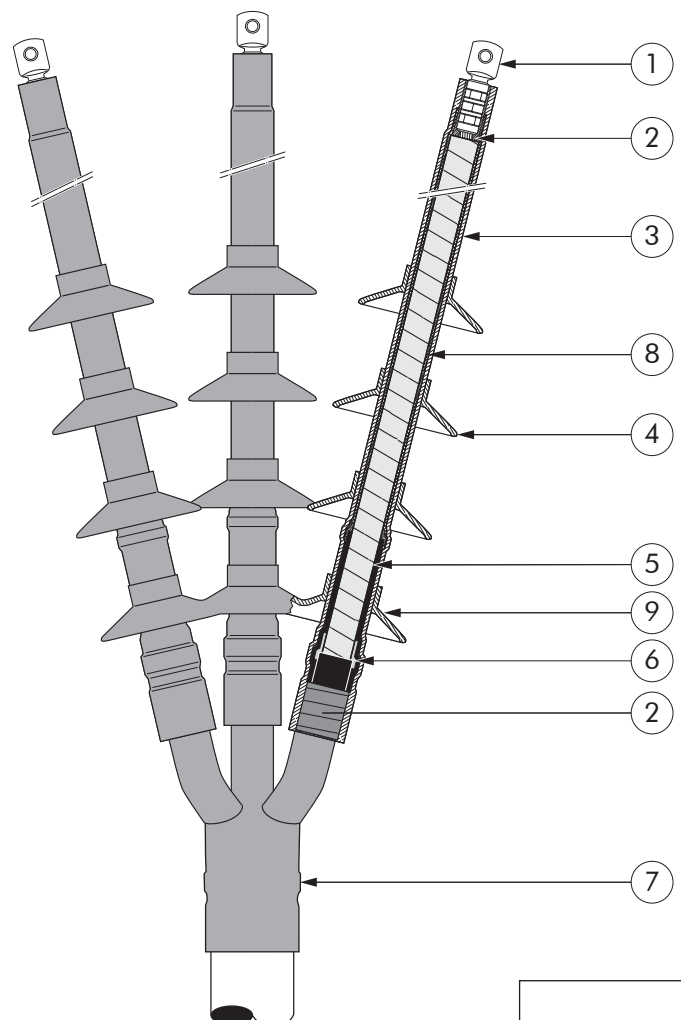

For use with other sizes and cable types. Please contact our representative.

Termination type	Voltage class (Um)	Cable cross section (mm ²)
SPDF 12/16-25	12 kV	16-25
SPDF 12/35-70		35-70
SPDF 12/95-240		95-150
SPDF 12/185-500		185-500

01/2010