


HEAVY DUTY COPPER TUBE TERMINALS



2A-M

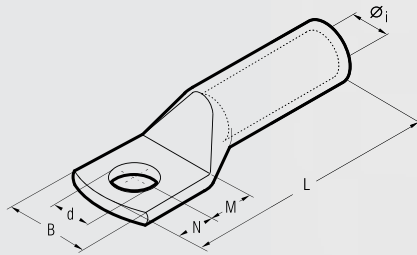

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Mechanical Tools	Hydraulic Tools				
			Øi	B	M	N	L	d							
16	8	2 A 3-M 8	5,8	15,0	9	8	43,5	8,4	600/100	HN 5	B 15D				
	10	2 A 3-M 10	5,8	18,0	11	10	47,5	10,5	500/100						
25	8	2 A 5-M 8	7,0	15,0	9	8	51,0	8,4	400/100	TN 70 SE					
	10	2 A 5-M 10	7,0	18,0	11	10	55,0	10,5	300/50						
35	12	2 A 5-M 12	7,0	21,0	14	12	60,0	13,2	300/50	TN 70 SE					
	8	2 A 7-M 8	8,9	17,0	9	8	53,0	8,4	250/50						
50	10	2 A 7-M 10	8,9	19,0	11	10	57,0	10,5	250/50	TN 120 SE					
	12	2 A 7-M 12	8,9	21,0	14	12	62,0	13,2	200/50						
63	10	2 A 10-M 10	10,0	20,0	11	10	63,0	10,5	200/50	TN 120 SE					
	12	2 A 10-M 12	10,0	21,0	14	12	68,0	13,2	150/50						
70	14	2 A 10-M 14	10,0	25,0	16	14	72,0	15,0	150/50	TN 120 SE					
	16	2 A 10-M 16	10,0	26,0	18	16	76,0	17,0	150/50						
95	10	2 A 14-M 10	11,3	21,0	11	10	70,0	10,5	100/50	TN 120 SE					
	12	2 A 14-M 12	11,3	22,0	14	12	75,0	13,2	100/50						
120	14	2 A 14-M 14	11,3	25,0	16	14	79,0	15,0	100/50	TN 120 SE					
	16	2 A 14-M 16	11,3	26,0	18	16	83,0	17,0	100/50						
125	10	2 A 19-M 10	13,5	25,0	11	10	76,5	10,5	75/25	TN 120 SE					
	12	2 A 19-M 12	13,5	25,0	14	12	81,5	13,2	75/25						
150	14	2 A 19-M 14	13,5	25,0	16	14	85,5	15,0	75/25	TN 120 SE					
	16	2 A 19-M 16	13,5	27,0	18	16	90,5	17,0	75/25						
185	20	2 A 19-M 20	13,5	29,5	22	20	97,5	21,0	75/25	TN 120 SE					
	10	2 A 24-M 10	15,2	28,5	11	10	82,0	10,5	50/25						
240	12	2 A 24-M 12	15,2	28,5	14	12	87,0	13,2	50/25	TN 120 SE					
	14	2 A 24-M 14	15,2	28,5	16	14	91,0	15,0	50/25						
300	16	2 A 24-M 16	15,2	28,5	18	16	95,0	17,0	50/25	TN 120 SE					
	20	2 A 24-M 20	15,2	30,0	22	20	103,0	21,0	50/25						
400	10	2 A 30-M 10	16,7	31,5	13	11	92,0	10,5	50/25	TN 120 SE					
	12	2 A 30-M 12	16,7	31,5	16	14	98,0	13,2	30/15						
500	14	2 A 30-M 14	16,7	31,5	18	16	102,0	15,0	30/15	TN 120 SE					
	16	2 A 30-M 16	16,7	31,5	19	17	104,0	17,0	30/15						
630	20	2 A 30-M 20	16,7	31,5	22	20	110,0	21,0	30/15	TN 120 SE					
	12	2 A 37-M 12	19,2	35,5	16	14	108,0	13,2	30/15						
800	14	2 A 37-M 14	19,2	35,5	18	16	112,0	15,0	30/15	TN 120 SE					
	16	2 A 37-M 16	19,2	35,5	19	17	114,0	17,0	30/15						
1000	20	2 A 37-M 20	19,2	35,5	22	20	120,0	21,0	30/15	TN 120 SE					
	12	2 A 48-M 12	21,1	39,0	16	14	109,0	13,2	20/5						
1200	14	2 A 48-M 14	21,1	39,0	18	16	113,0	15,0	20/5	TN 120 SE					
	16	2 A 48-M 16	21,1	39,0	19	17	115,0	17,0	20/5						
1500	20	2 A 48-M 20	21,1	39,0	22	20	121,0	21,0	25/5	TN 120 SE					
	12	2 A 60-M 12	23,7	44,0	20	14	129,5	13,2	20/5						
1800	14	2 A 60-M 14	23,7	44,0	22	16	133,5	15,0	20/5	TN 120 SE					
	16	2 A 60-M 16	23,7	44,0	22	19	136,5	17,0	20/5						
2100	20	2 A 60-M 20	23,7	44,0	24	23	142,5	21,0	20/5	TN 120 SE					
	12	2 A 80-M 12	27,0	51,0	22	19	140,0	13,2	15/5						
2400	14	2 A 80-M 14	27,0	51,0	22	19	140,0	15,0	10/5	TN 120 SE					
	16	2 A 80-M 16	27,0	51,0	22	19	140,0	17,0	10/5						
2700	20	2 A 80-M 20	27,0	51,0	24	23	146,0	21,0	15/5	TN 120 SE					
	16	2 A 100-M 16	30,3	56,5	22	19	147,0	17,0	10/1						
3000	20	2 A 100-M 20	30,3	56,5	24	23	153,0	21,0	10/1	TN 120 SE					
	16	2 A 120-M 16	33,4	61,5	22	19	159,0	17,0	20/1						
3300	20	2 A 120-M 20	33,4	61,5	24	23	165,0	21,0	20/1	TN 120 SE					
	20	2 A 160-M 20	38,0	72,0	24	23	187,0	21,0	12/1						
3600	20	2 A 200-M 20	44,0	80,0	24	23	202,0	21,0	6/1	TN 120 SE					

2A-M series terminals are made from high purity copper tube, and are annealed. They feature a double length barrel for enhanced electrical and mechanical performance in heavy duty applications. The absence of an inspection hole prevents the entry of water or moisture into the crimped joint making these terminals suitable for outdoor applications. The terminals are electrolytically tin plated to prevent atmospheric corrosion. 2A-2M series terminals with double stud hole palm are also available, please consult us.