


**POLYAMIDE PA6.6 INSULATED FORK TERMINALS**

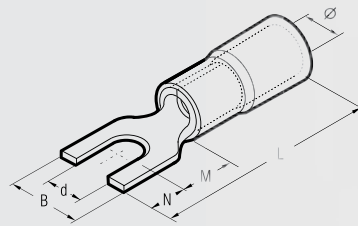

**ANE-U**

Conductor Size Flexible sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Mechanical Tools		Hydraulic Tools	
			Ø	B	M	N	L	d					
10	4	ANE 2-U 4	8,0	9,8	7,5	7	35,1	4,3	500/100	HNN 3		B 35-500	
	5	ANE 2-U 5	8,0	11,5	7,5	7	35,1	5,3	500/100	HNN 4		HT 51 RH 50 B 51 B 55	
16	4	ANE 3-U 4	9,2	10,0	10,0	8	41,1	4,3	500/100	TNN 70	TNN 120		
	5	ANE 3-U 5	9,2	11,5	10,0	8	41,1	5,3	500/100			B 150	HT 120 and tools and heads with 130 kN crimping force ECM-H3D

ANE-U series terminals are made from electrolytic copper, rolled, tin plated and brazed. The interior of the PA6.6 insulated sleeve is funnel shaped so as to ensure complete and easy introduction of the conductor strands.


The operating temperature range is - 20 to + 115°C (Surge + 130°C).

In order to achieve the best electrical and mechanical performance it is suggested that they are crimped using dies and tools specifically developed for this purpose by Cembre.

**FLEXIBLE BRAIDS**



**FL**

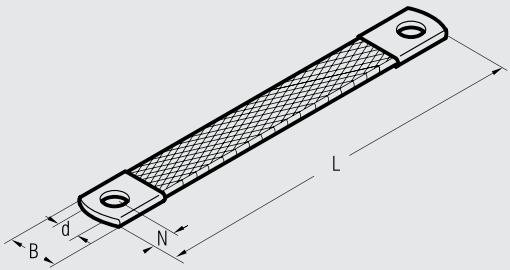

Size sqmm	Ø Stud mm	Ref.	Dimensions mm				Quantity
			B	N	L	d	
10	8	FL 10-150	17	10	150	8,5	50
	8	FL 10-200	17	10	200	8,5	50
	8	FL 10-250	17	10	250	8,5	50
	8	FL 16-150	17	10	150	8,5	50
	8	FL 16-200	17	10	200	8,5	50
	8	FL 16-250	17	10	250	8,5	50
16	8	FL 16-320	17	10	320	8,5	50
	8	FL 16-350	17	10	350	8,5	50
	8	FL 16-420	17	10	420	8,5	25
	8	FL 16-570	17	10	570	8,5	25
	8	FL 16-660	17	10	660	8,5	25
	8	FL 25-150	21	10	150	8,5	50
25	8	FL 25-200	21	10	200	8,5	50
	8	FL 25-250	21	10	250	8,5	50
	8	FL 25-300	21	10	300	8,5	50

Flexible braids are manufactured from electrolytic copper wire. Braids of different conductor sizes or lengths are available on request. Standard finish - bright copper.

Flexible braids can be supplied tin plated, in this case add the suffix "ST" to reference.

- E.g.:
- FL 10-150 (Bright copper)
  - FL 10-150-ST (Tin plated)