


SE XLPE SOLDERLESS EARTH CONNECTION INDOOR

Application

Required to effectively earth the copper tape screen of polymeric (XLPE & EPR) insulated cables without soldering.
Supplied in sets of three.

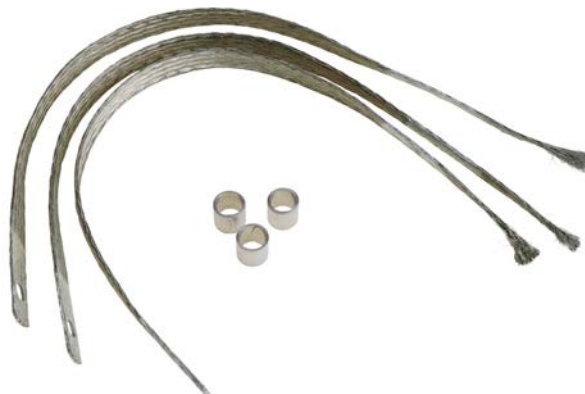

Part number 3-core kit	Voltage class (Um)	6.6 kV	12 kV	(17 &) 24 kV	36 kV	Diameter over screen (mm)
SE1	Cable cross section (mm ²)	16-50	16-50	-	-	12-18
SE2		70-150	70-150	25-50	25-35	19-24
SE3		185-300	185-240	95-150	50-70	25-30
SE4		400-630	300-630	185-500	95-300	31-44
SE5		800-1000	800-1000	630-1000	400-1000	41-65

CK PILC SOLDERLESS EARTH CONNECTION OUTDOOR

Application

For use with HSGK range of gland kits when installing lead sheathed cables (PILC).
Allows the earthing of the lead sheath without need for plumbing.
Supplied in sets of three.



Indoor kit Part number	Indoor kit Part number	Cable cross section	Diameter over lead sheath (mm)
CK1	CK1-O	16-95 mm ²	28-39
CK2	CK2-O	120-185 mm ²	40-50
CK3	CK3-O	240-300 mm ²	51-60
CK4	CK4-O	400-500 mm ²	61-80

01/2010