

SPDI HEAT-SHRINKABLE THREE CORE PILC/PICAS INDOOR TERMINATION

Up to 12 kV

6/10 (12) kV
6.35/11 (12) kV

Application

Heat-shrinkable terminations for three core PILC/PICAS cables, are used by power utilities and in industrial applications. For use indoor in controlled environmental conditions.

Design

1. Cable lug (supplied on request).
2. Water sealing mastic.
3. Anti-tracking heat-shrinkable tube.
4. Anti-tracking sheds (when required).
5. Stress control heat-shrinkable tube.
6. Stress control mastic.
7. Break-out.
8. Barrier tube.



Specifications and standards

Meets the requirements of CENELEC HD 629.1 and IEC 60502-4.

Ordering instructions

Select the part number and add both system voltage and conductor size range.

Example part number:
SPDI 12/95-240

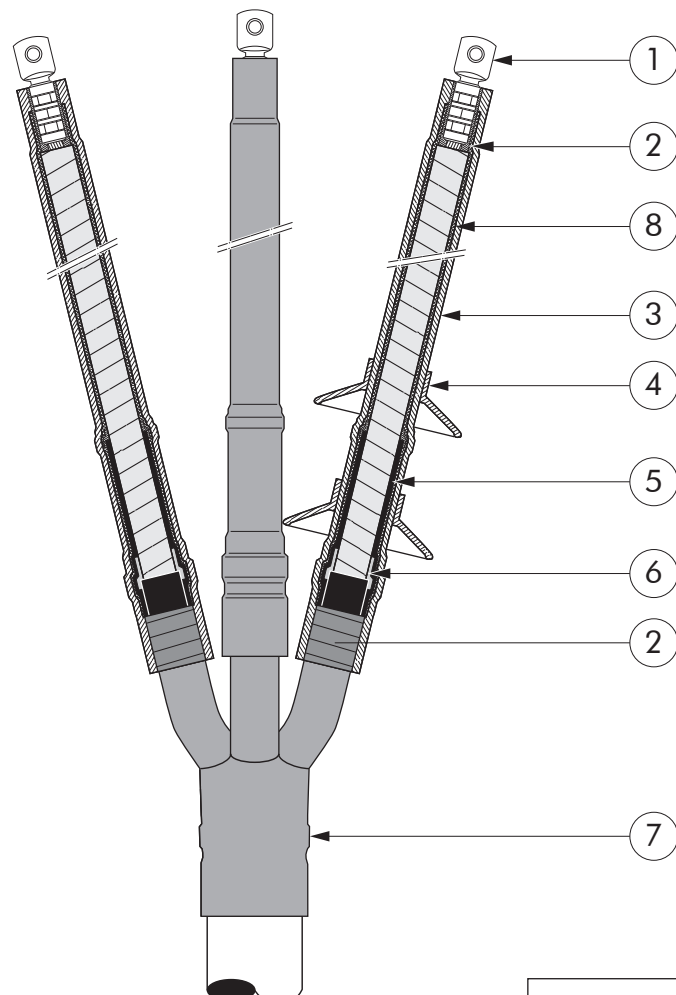

Termination type	Voltage class (Um)	Cable cross section (mm ²)
SPDI 12/16-25	12 kV	16-25
SPDI 12/35-70		35-70
SPDI 12/95-240		95-150
SPDI 12/185-500		185-500