

# SPDF HEAT-SHRINKABLE THREE CORE PILC/PICAS OUTDOOR TERMINATION

Up to 12 kV

6/10 (12) kV  
6.35/11 (12) kV

## Application

Heat-shrinkable terminations for three core PILC/PICAS cables, are widely used by power utilities and in industrial applications.

For use outdoors and exposed to prolonged sunshine and other weather conditions.

## Design

1. Cable lug (supplied on request).
2. Water sealing mastic.
3. Anti-tracking heat-shrinkable tube.
4. Anti-tracking sheds.
5. Stress control heat-shrinkable tube.
6. Stress control mastic.
7. Break-out.
8. Oil barrier tube.
9. Anti-tracking tri-shed.


## Specifications and standards

Meets the requirements of CENELEC HD 629.1 and IEC 60502-4.

## Ordering instructions

Select the part number and add both system voltage and conductor size range.

**Example part number:**  
SPDF 12/95-240

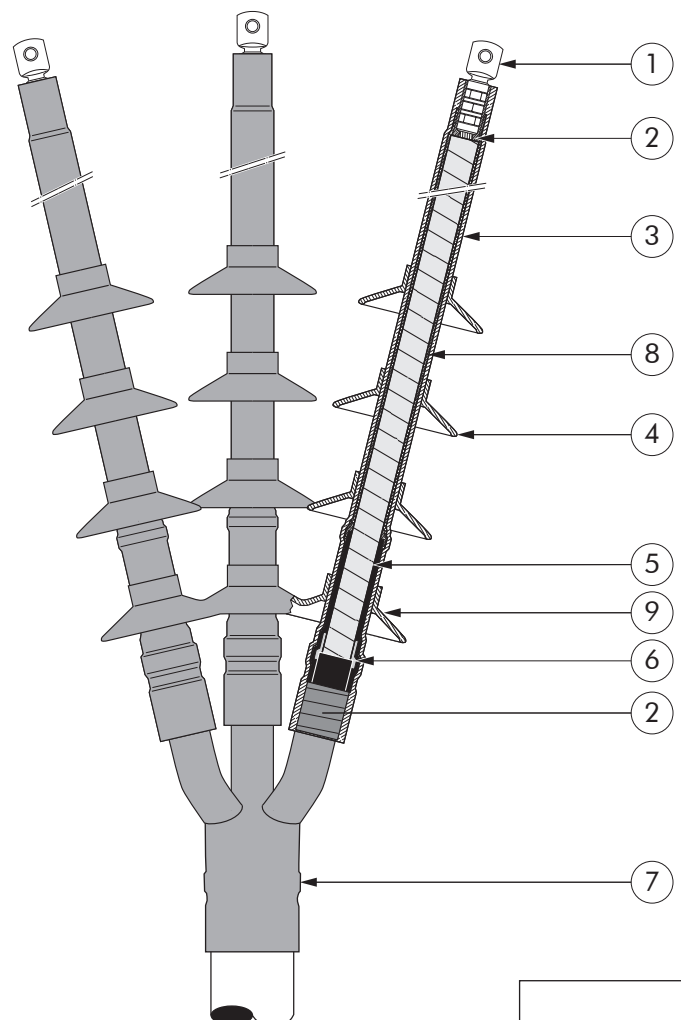

For use with other sizes and cable types. Please contact our representative.

Termination type	Voltage class (Um)	Cable cross section (mm <sup>2</sup> )
SPDF 12/16-25	12 kV	16-25
SPDF 12/35-70		35-70
SPDF 12/95-240		95-150
SPDF 12/185-500		185-500

01/2010