

# SRDF HEAT-SHRINKABLE THREE CORE XLPE OUTDOOR TERMINATION

Up to 36 kV

6/10	(12)	kV
6.35/11	(12)	kV
8.7/15	(17.5)	kV
12/20	(24)	kV
12.7/22	(24)	kV
18/30	(36)	kV
19/33	(36)	kV

## Application

Heat-shrinkable terminations for three core polymeric cables, are widely used by power utilities and in industrial applications. For use outdoors and exposed to prolonged sunshine and other weather conditions.

## Design

1. Cable lug (supplied on request).
2. Water sealing mastic.
3. Anti-tracking heat-shrinkable tube.
4. Anti-tracking sheds.
5. Stress control heat-shrinkable tube.
6. Stress control mastic.
7. Break-out.


## Specifications and standards

Meets the requirements of CENELEC HD 629.1 and IEC 60502-4.

## Ordering instructions

Select the part number and add both system voltage and conductor size range.

**Example part number:**  
SRDF 12/95-240

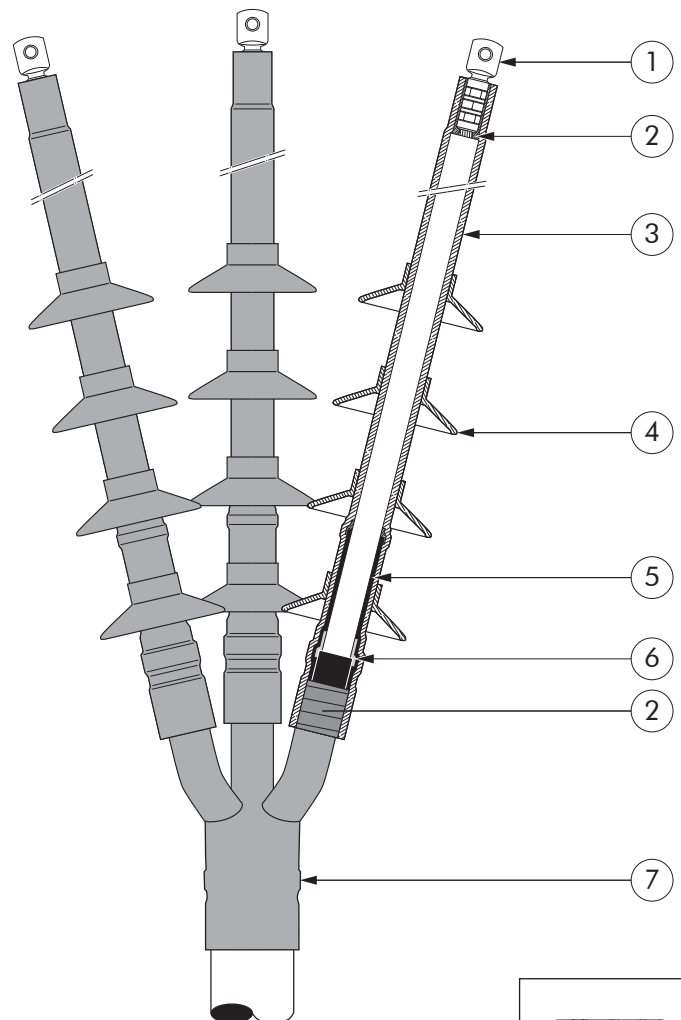

Termination type	Voltage class (Um)	12 kV	(17 &) 24 kV	36 kV
SRDF	Cable cross section (mm <sup>2</sup> )	35-70	25-70	70-120
		95-240	95-185	150-240
		240-500	240-400	240-400



For use with other sizes and cable types. Please contact our representative.